

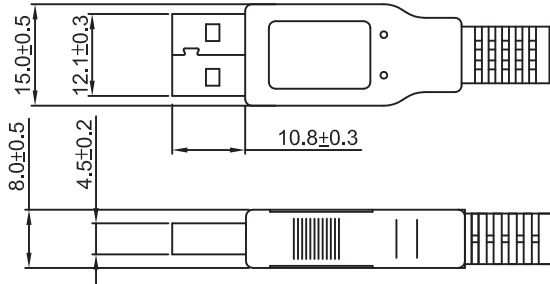
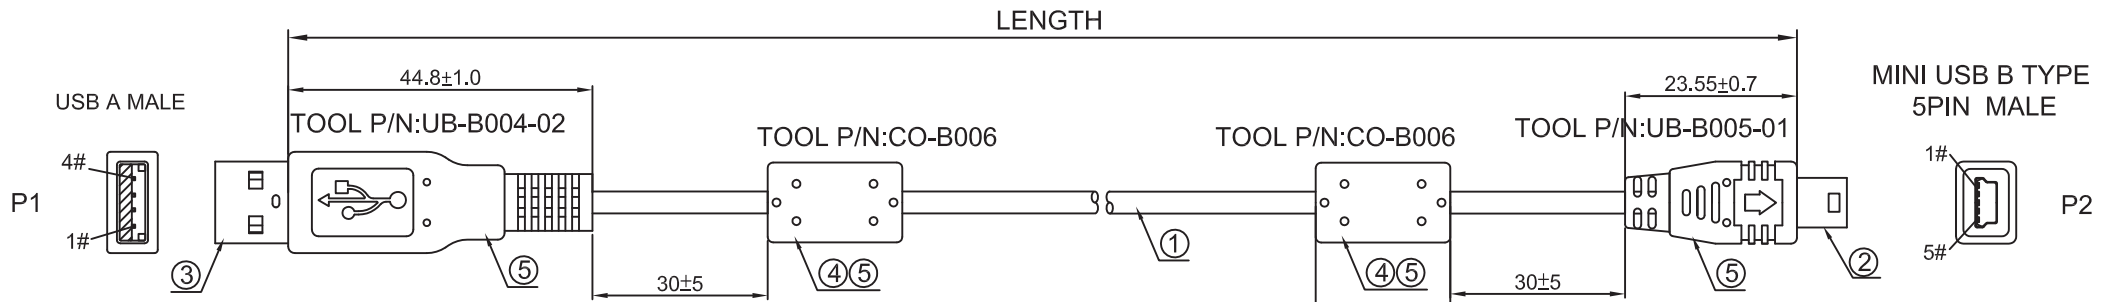
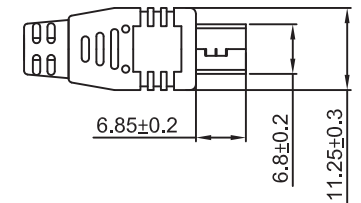


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST EDITION	2016/08/23	

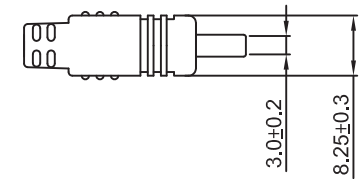


PART NO.	LENGTH
SC-S-0037-3M	3000±30
SC-S-0037-3.5M	3500±30
SC-S-0037-4M	4000±50
SC-S-0037-5M	5000±50



ELECTRICAL CHARACTER:

- 1.100% OPEN & SHORT TEST.
- 2.INSULATION RESISTANCE: 5 Mohm MIN.
- 3.CONTACT RESISTANCE: 3 ohm MAX.
- 4.HI-POT:DC300V 10us
- 5.TOTAL MATING FORCE:3.50 Kgf Max.
TOTAL UNMATING FORCE:1.0 Kgf Min.

PIN ASSIGNMENT

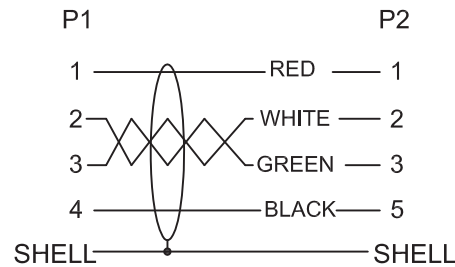

ITEM	QTY	PART NUMBER	DESCRIPTION
5		G0027	ALL CONNECTORS OVERMOLD VIOLET PVC.
4	2	T0005-1	FERRITE CORE:10.5*20*6.0MM.
3	1	A0182	USB A TYPE MALE GOLD PLATED 30U" SOLDER TYPE WHITE INSULATOR.
2	1	A0197-1	MINI USB B 5P MALE GOLD PLATED 30U" BLACK INSULATOR.
1	1	E1014	(28#*1PAIR+AM+SP+TEFLON)*1+26#*2C+AM+SP+TEFLON OD:5.2MM UL20276 VIOLET.

Seconn International Enterprise Co., Ltd.							
TOLERANCES		PROJECTION		TITLE			
AS DRAWING				USB Cable Assembly Mini USB B 5 Pin Male to A Male Type Violet High Flexible Cable			
		mm					
DRAWN	ZhaoPeng	DATE	2016/08/23	PART NO.	SC-S-0037		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A