


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2023/08/01	
B	CHANGE PIN ASSIGNMENT	2023/08/03	

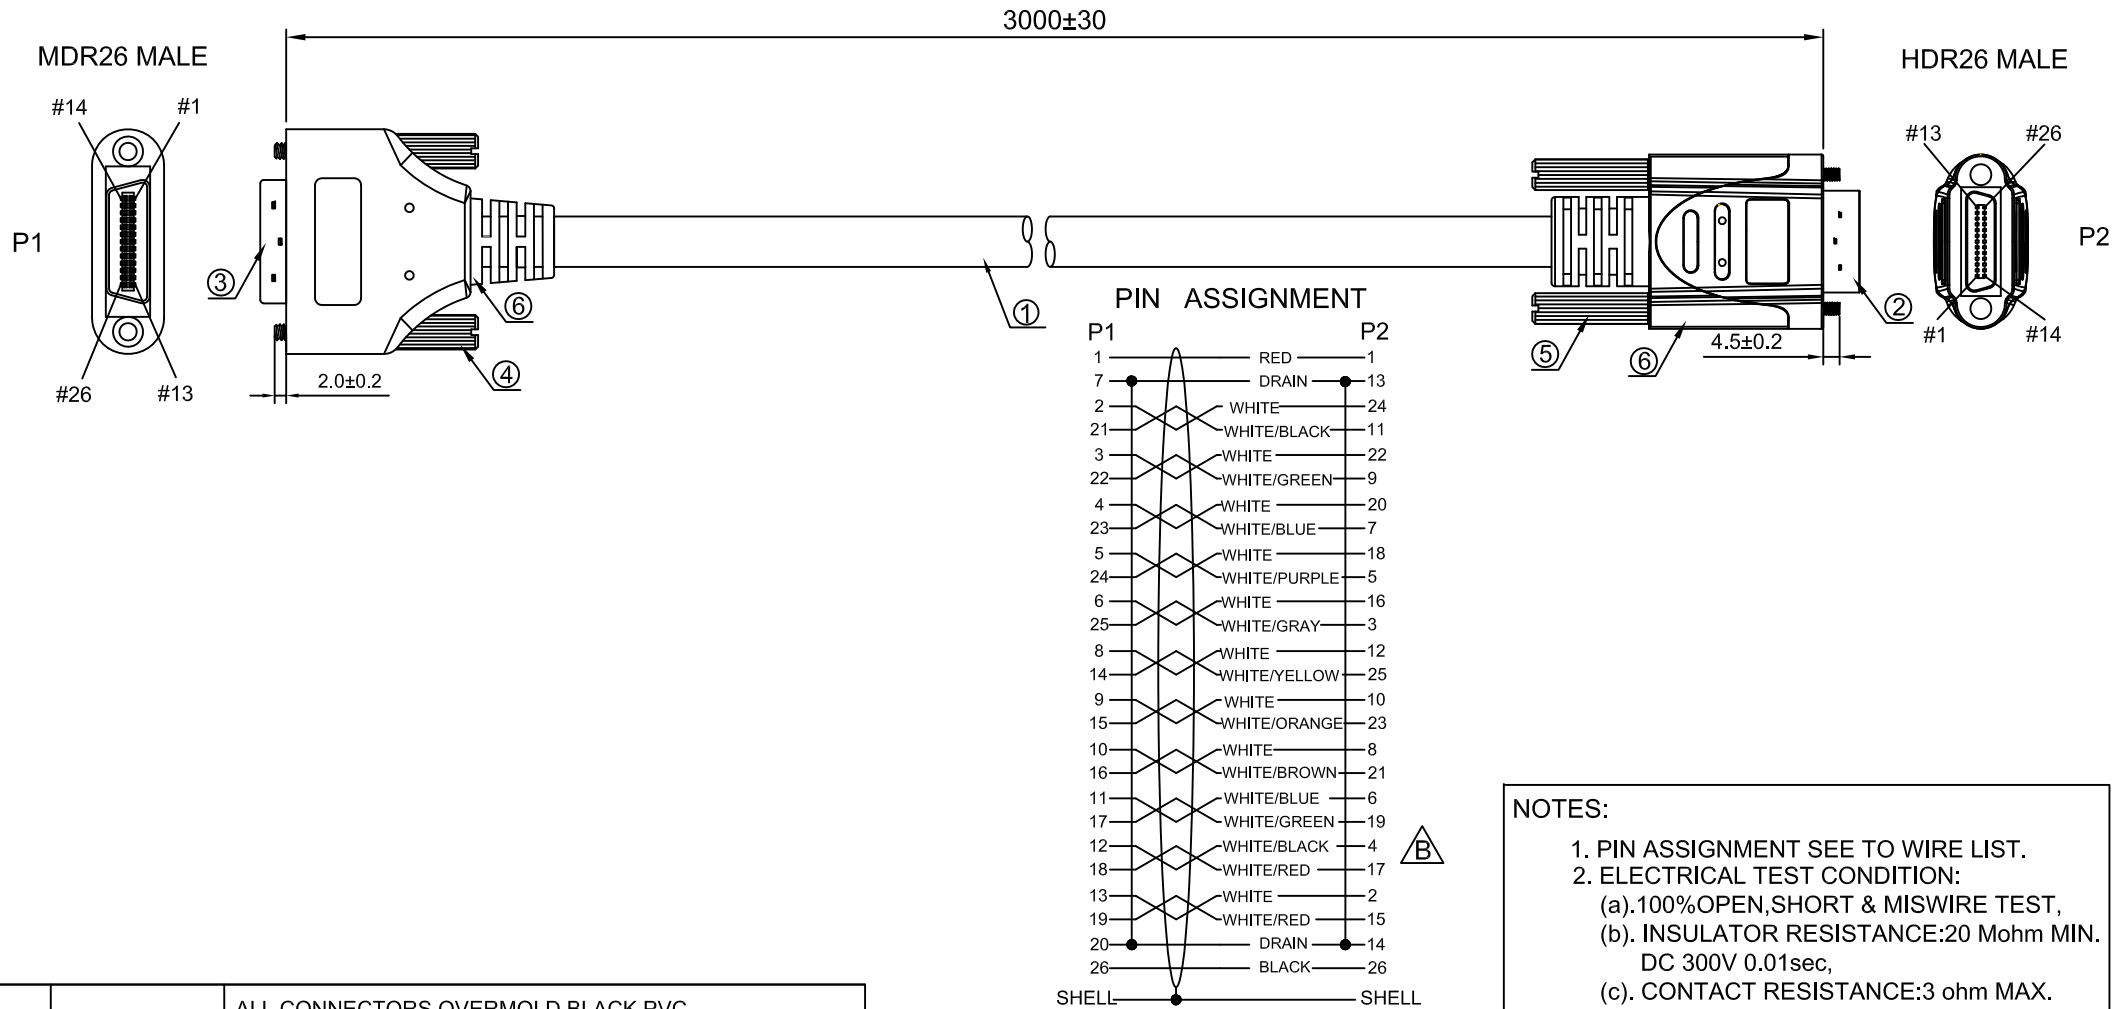

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec,
  - CONTACT RESISTANCE: 3 ohm MAX.

6			ALL CONNECTORS OVERMOLD BLACK PVC.
5	2		SCREW:M2-0.4-6g 5.0*48.5MM, NICKELPLATED.
4	2		SCREW:#4-40UNC 6.0*35.3MM NICKEL PLATED.
3	1		MDR26 MALE GOLD FLASH CONTACTS, BLACK INSULATOR.
2	1		HDR26 MALE GOLD FLASH CONTACTS, BLACK INSULATOR.
1	1		[(28AWG*1P+AM)*11PCS+24AWG*2C+2D+M+AM+B BLACK PVC JACKET OD:9.5MM UL20276.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Bao jin</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	B	MDR26 M/HDR26 M			
APP, BY		DATE	2023/08/01	TOLERANCES			
DWG NO.	SE-S-0439			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0439-3M			SHEET	1/1	SIZE	A4