


RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2024/05/16	

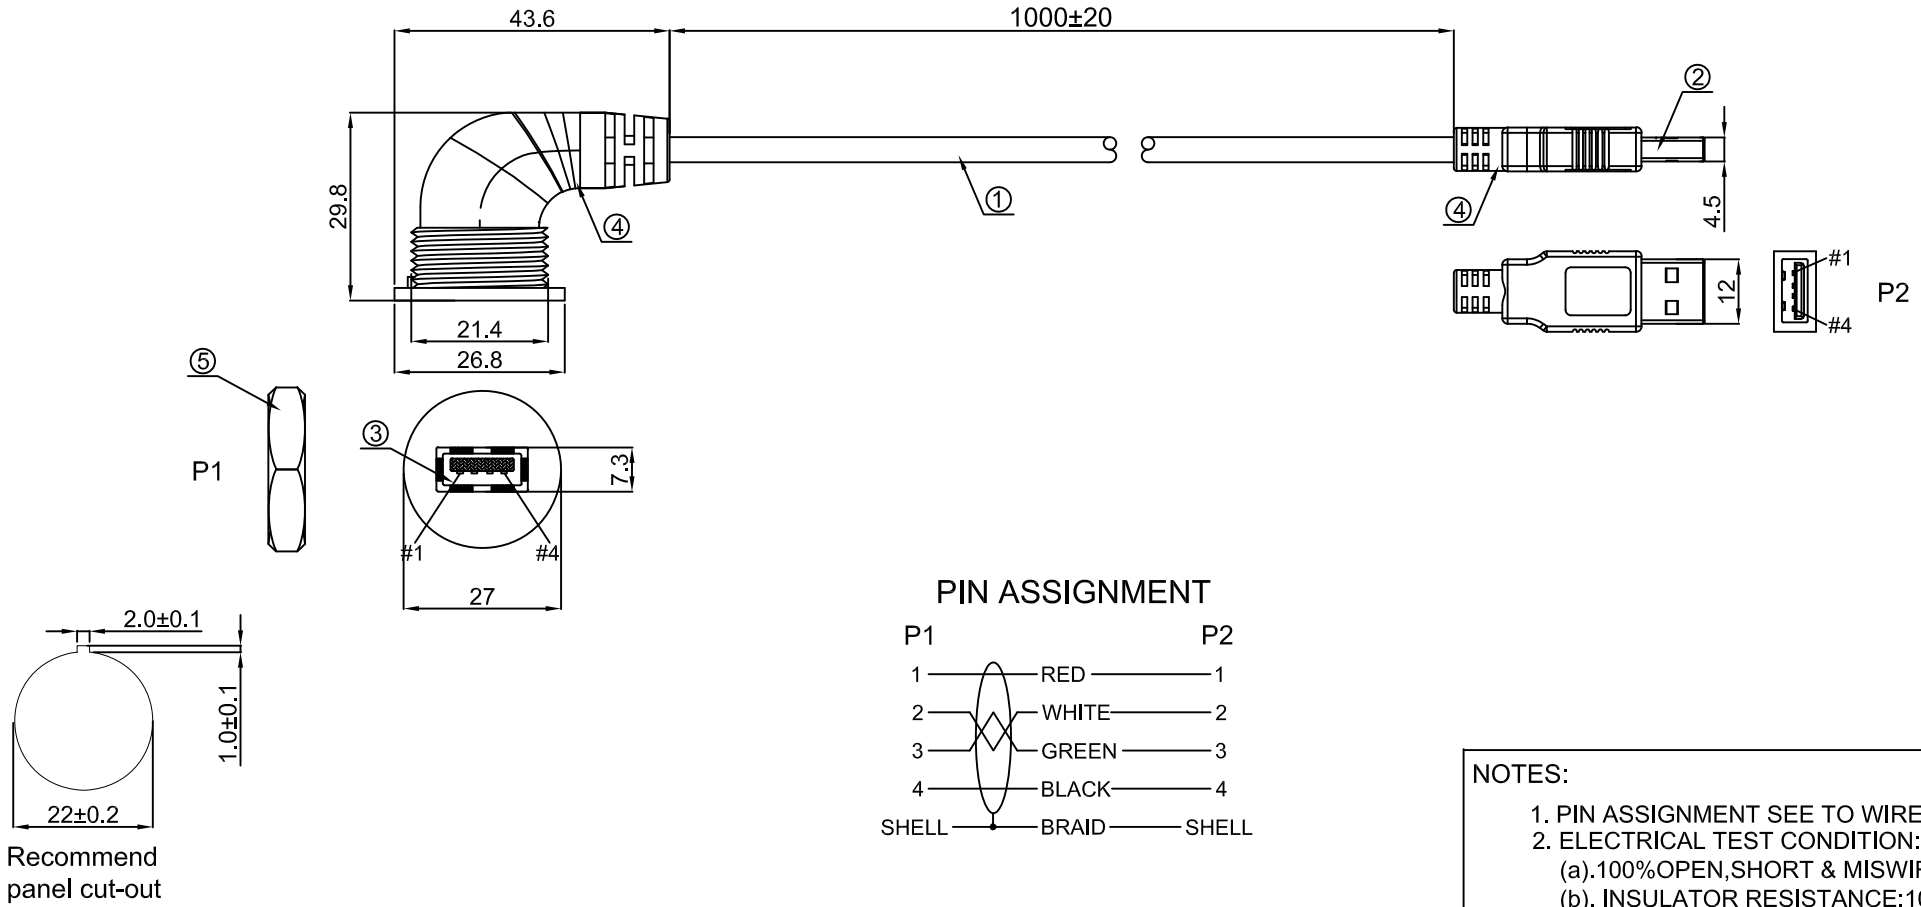

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 10 Mohm MIN. DC 150V 0.01sec,
 - CONTACT RESISTANCE: 2 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1		HEX NUT M22*1.5*S27 NICKEL PLATED.
4			BLACK PVC 45P.
3	1		USB2.0 A FEMALE WHITE INSULATOR SOLDER TYPE, CONTACT GOLD PLATED.
2	1		USB2.0 A MALE WHITE INSULATOR SOLDER TYPE, CONTACT GOLD PLATED.
1	1	E0843	28AWG*1P+24AWG*2C+ADB OD:4.5MM BLACK PVC JACKET UL2725.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Eao jin</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	USB A F/USB A M			
APP, BY		DATE	2024/05/16	TOLERANCES			
DWG NO.	SE-S-0451			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	240416-B			SHEET	1/1	SIZE	A4