


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/05/05	

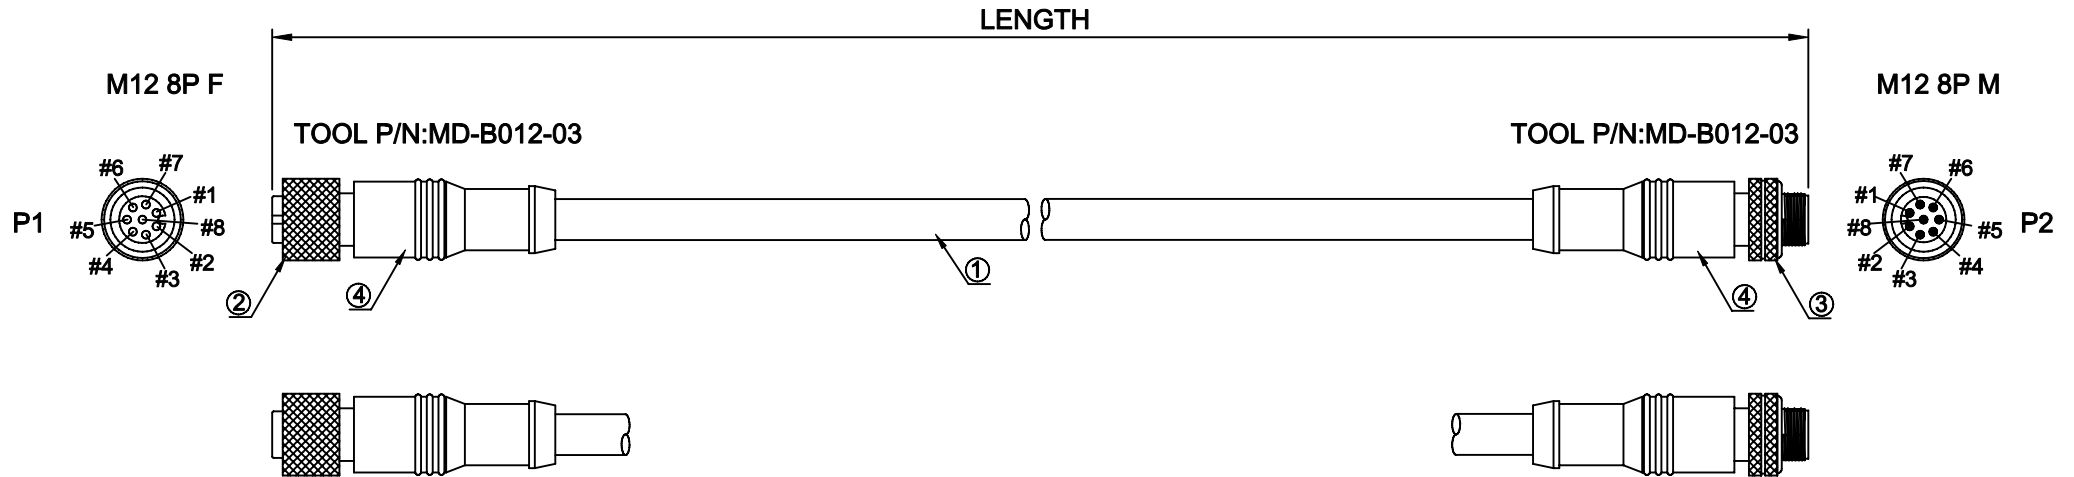

**PIN ASSIGNMENT**

M12 8P F	M12 8P M
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____
SHELL _____	SHELL _____

PART NUMBER	LENGTH
M12 8P M/F CABLE-0.6M	600±25
M12 8P M/F CABLE-1.0M	1000±30
M12 8P M/F CABLE-2.0M	2000±30
M12 8P M/F CABLE-5.0M	5000±50

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01~0.03sec.
  - (c). CONTACT RESISTANCE: 3 ohm MAX.

4		G0107	ALL CONNECTORS OVERMOLD BLACK PA.
3	1		M12 8PIN MALE, BALCK INSULATOR, SOLDER TYPE, WITH SHELL.
2	1	A0571	M12 8PIN FEMALE, BALCK INSULATOR, SOLDER TYPE, WITH SHELL.
1	1		24AWG*8C+AD, OD:4.5MM, BLACK PVC JACKET, UL2464.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	Yi jialu	SCALE	1:1	TITLE		
CHECK, BY	<i>Caojiawei</i>	REV	A	M12 8P M/F CABLE XM LENGTH		
APP, BY	<i>Mr. Huang</i>	DATE	2011/05/05	TOLERANCES		
DWG NO.	SE-S-0021		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	M12 8P M/F CABLE-XM		SHEET	1/1	SIZE	A4