


DESCRIPTION CONTROL				DESCRIPTION CONTROL			
REV	DESC	DATE	APP	REV	DESC	DATE	APP
E	REVISED100P TOOL	2006/01/09		A	FIRST RELEASE	2005/08/17	
F	CHANGE SCREW	2006/03/11		B	REVISED DRAWING	2005/08/21	
G	DESIGN MOLD AND CHANGE CONNECTOR	2008/03/11		C	REVISED100P TOOL	2005/08/18	
				D	CHANGE P/N.	2005/10/13	

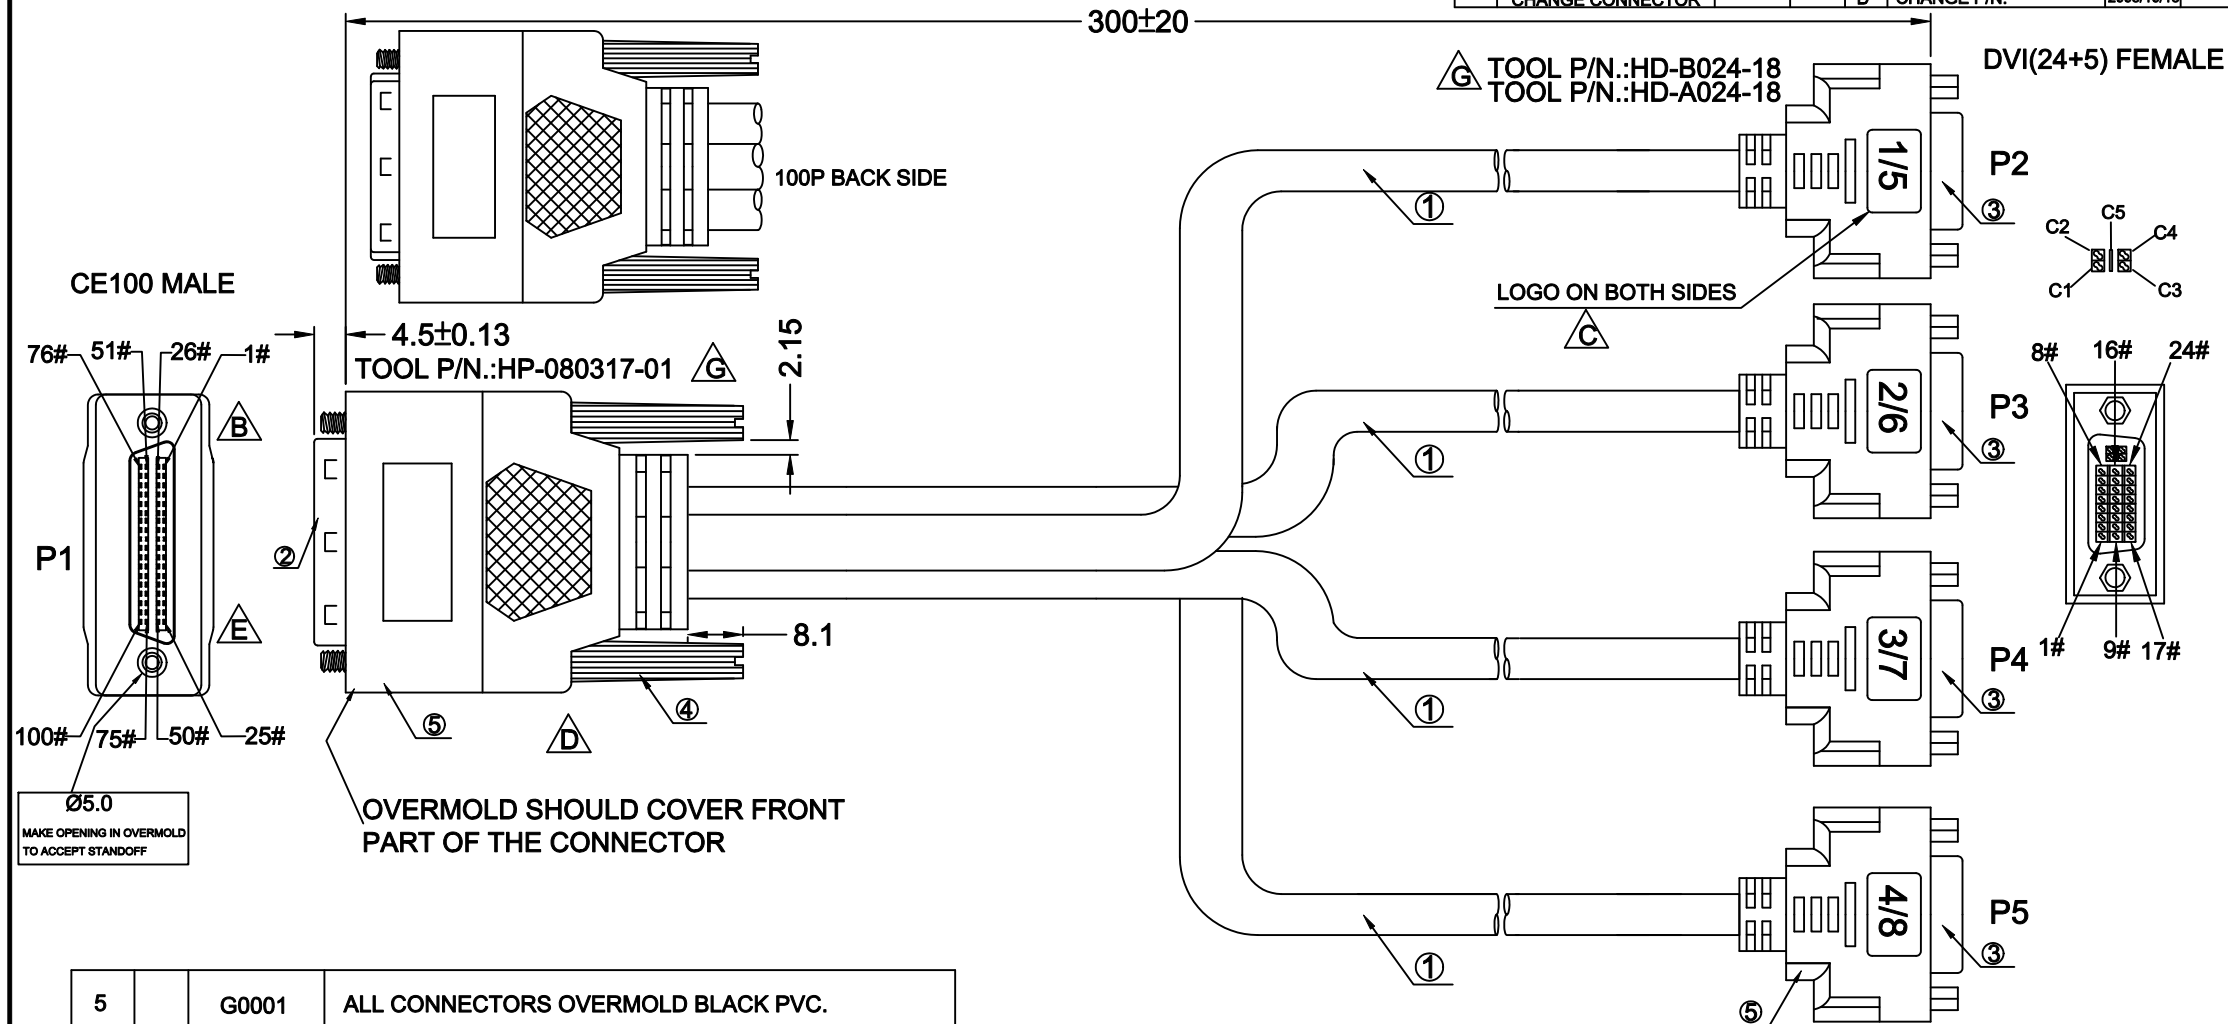





5		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
4	2		#4-40UNC 6.0*61.7MM ,BLACK PLASTIC.
3	4	A0426-1	DVI(24+5) FEMALE, WHITE INSULATOR, SOLDER TYPE. FRONT NUT.
2	1	A0338	CE100P MALE,SOLDER TYPE.(P/N.:021-01-00001)
1	4	E0576	UL20276 [32AWG*3COAX(95% BRAID TINNED COPPER SHIELD,75±10 ohms)+(30AWG*1PAIR+DRAIN+FAM)* 4PCS+30AWG*7C]+AM+BRAID Ø7.5 BLACK PVC JACKET.
ITEM	QTY	PART NO.	DESCRIPTION

△C △F
△G

Seconn International Enterprise Co., Ltd.


	REV.	PART NO: SE-S-0001-1		
	G	CE100 Pin Male to 4x DVI Female UL20276 Cable 300mm length		
DRAW,BY: Li DongSheng		CUSTOMER P/N:		
CHECK,BY: James		SCALE	UNIT	SHEET
APP,BY: Mr. Huang		FREE	mm	1/3

DESCRIPTION CONTROL				DESCRIPTION CONTROL			
REV	DESC	DATE	APP	REV	DESC	DATE	APP
E	REVISED100P TOOL	2006/01/09		A	FIRST RELEASE	2005/06/17	
F	CHANGE SCREW	2006/03/11		B	REVISED DRAWING	2005/06/21	
G	DESIGN MOLD AND CHANGE CONNECTOR	2008/03/11		C	REVISED100P TOOL	2005/08/18	
				D	CHANGE P/N.	2005/10/13	

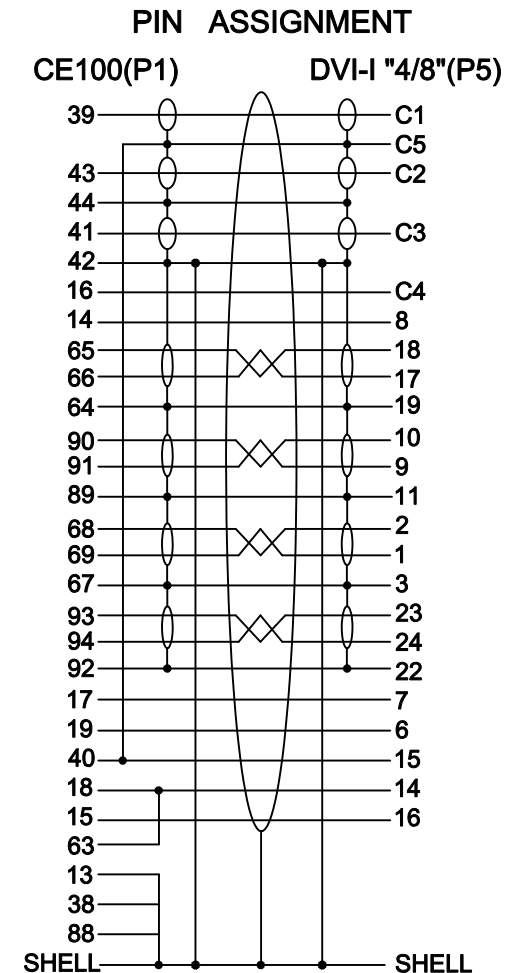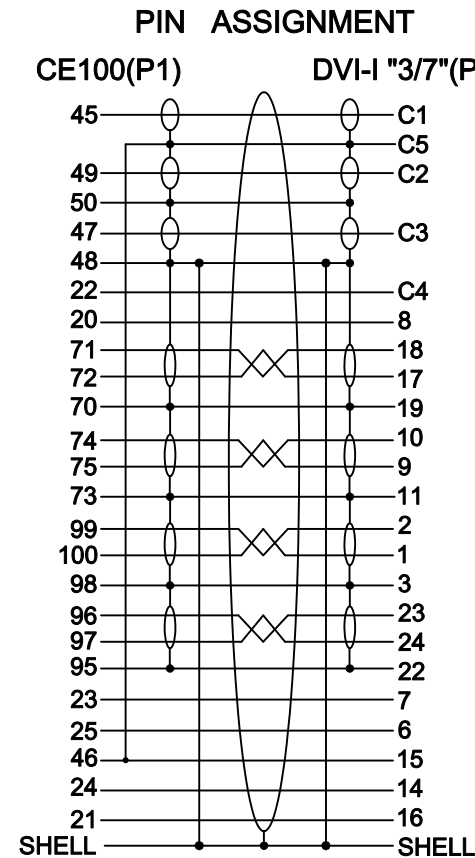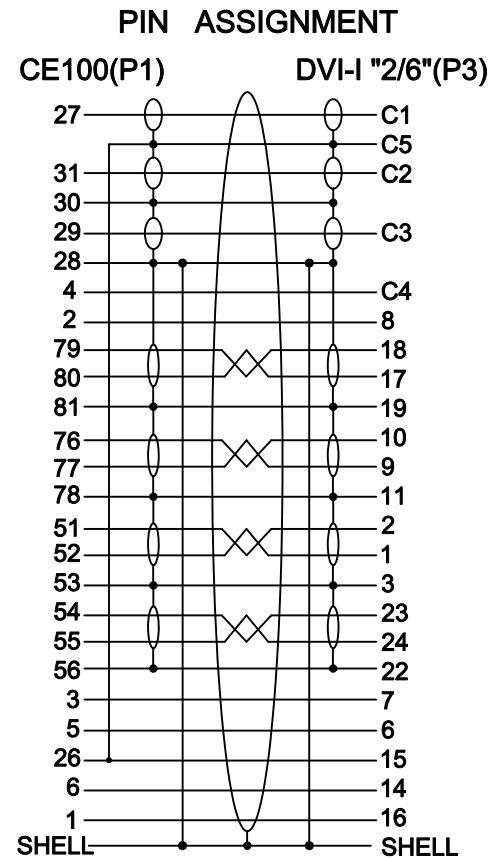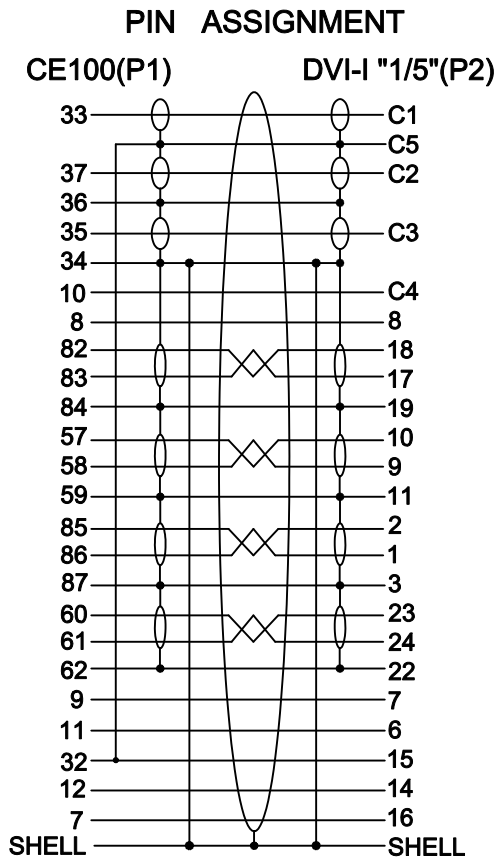









NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec,
 - CONTACT RESISTANCE:1 ohm MAX.

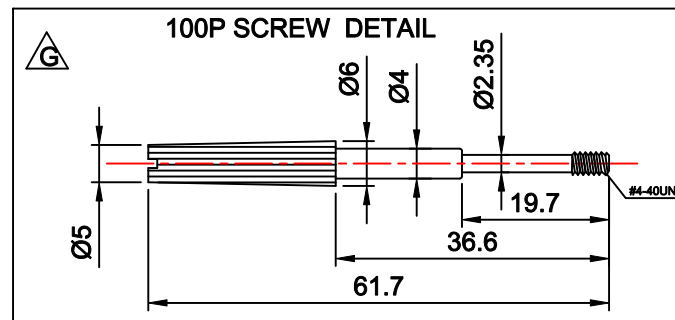

Seconn International Enterprise Co., Ltd.

	REV.	PART NO: SE-S-0001-1		
	G	CE100 Pin Male to 4x DVI Female UL20276 Cable 300mm length		
DRAW,BY: Li DongSheng		CUSTOMER P/N:		
CHECK,BY: James	SCALE	UNIT	SHEET	
APP,BY: Mr. Huang	FREE	mm	2/3	

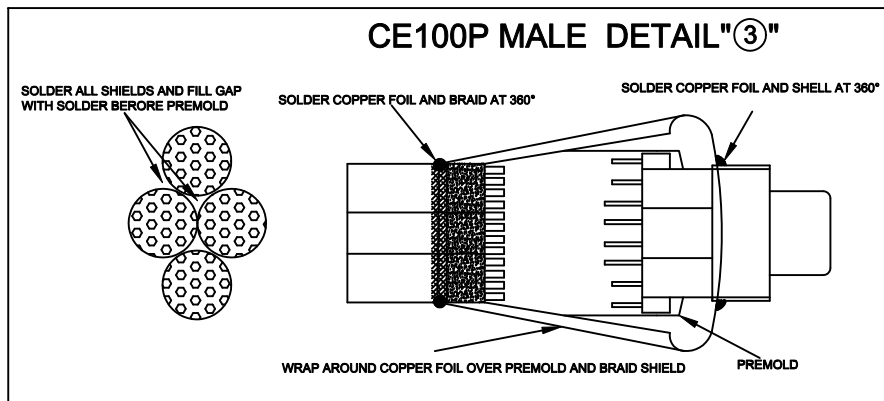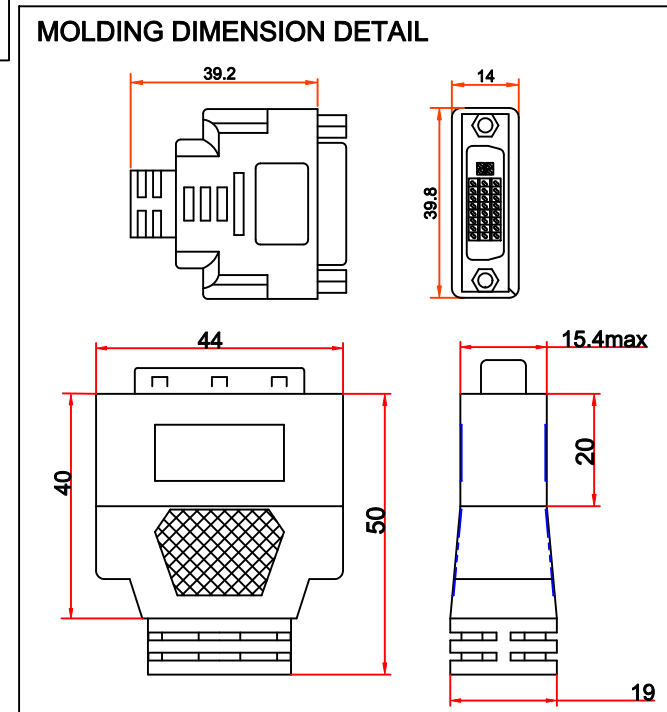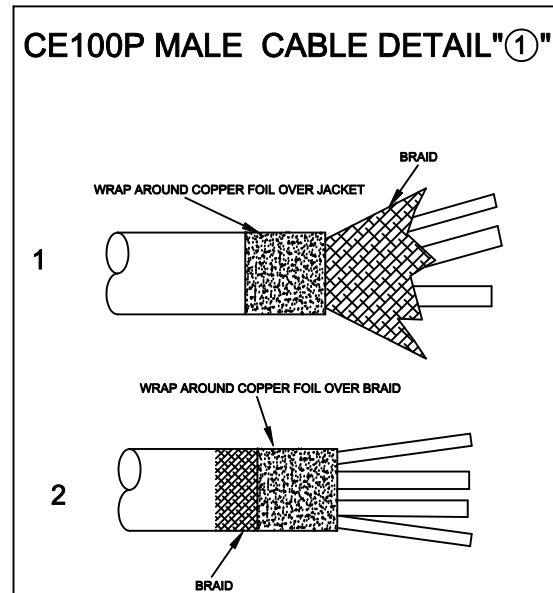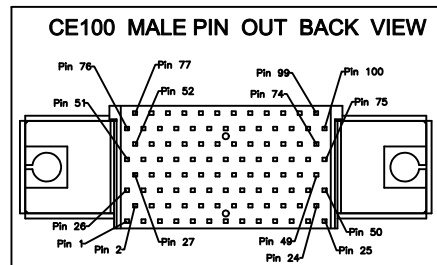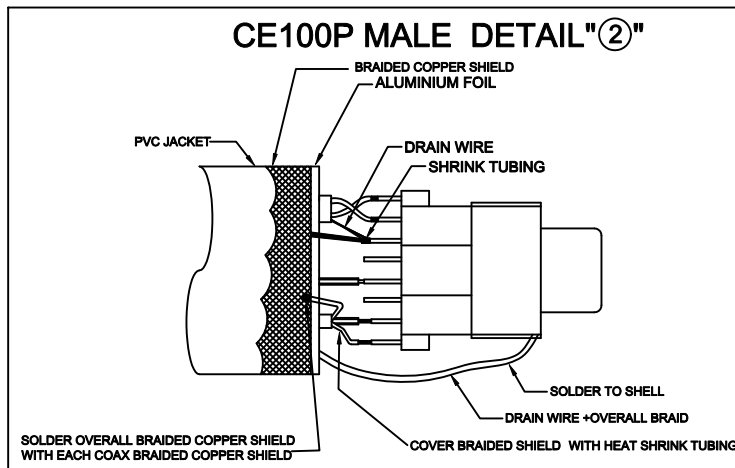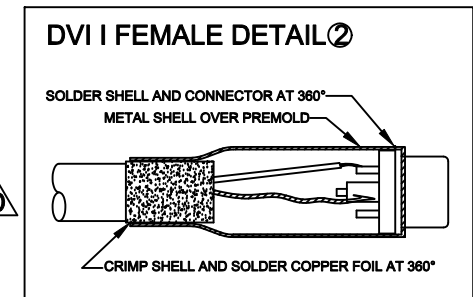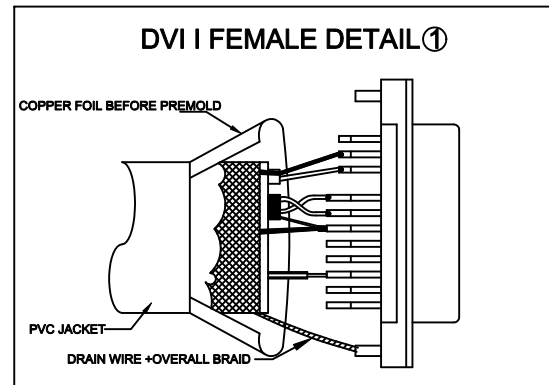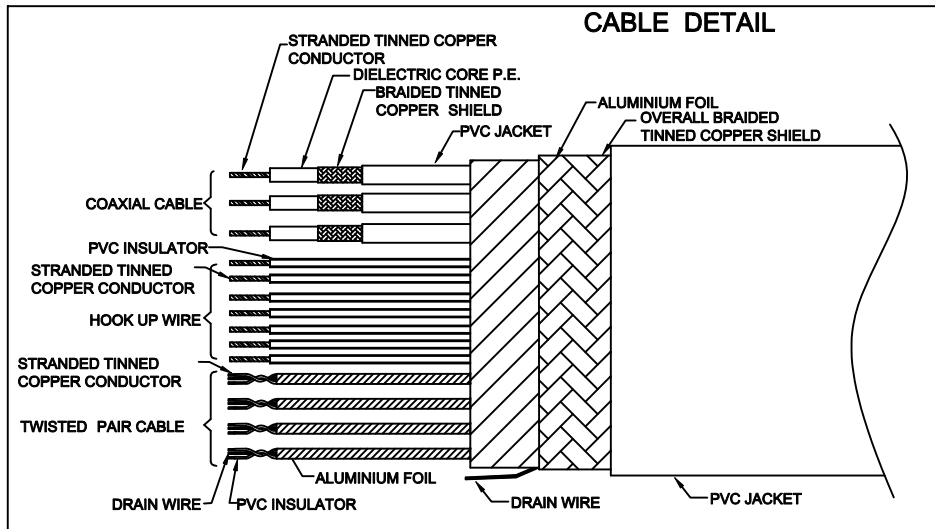

Seconn International Enterprise Co., Ltd.

	REV.	PART NO: SE-S-0001-1		
	G	CE100 Pin Male to 4x DVI Female UL20276 Cable 300mm length		
DRAW,BY: Li DongSheng		CUSTOMER P/N:		
CHECK,BY: James		SCALE	UNIT	SHEET
APP,BY: Mr. Huang		FREE	mm	3/3