


ITEM: DS-0104



DESCRIPTION		CONTROL	
REV	DESC	DATE	APP

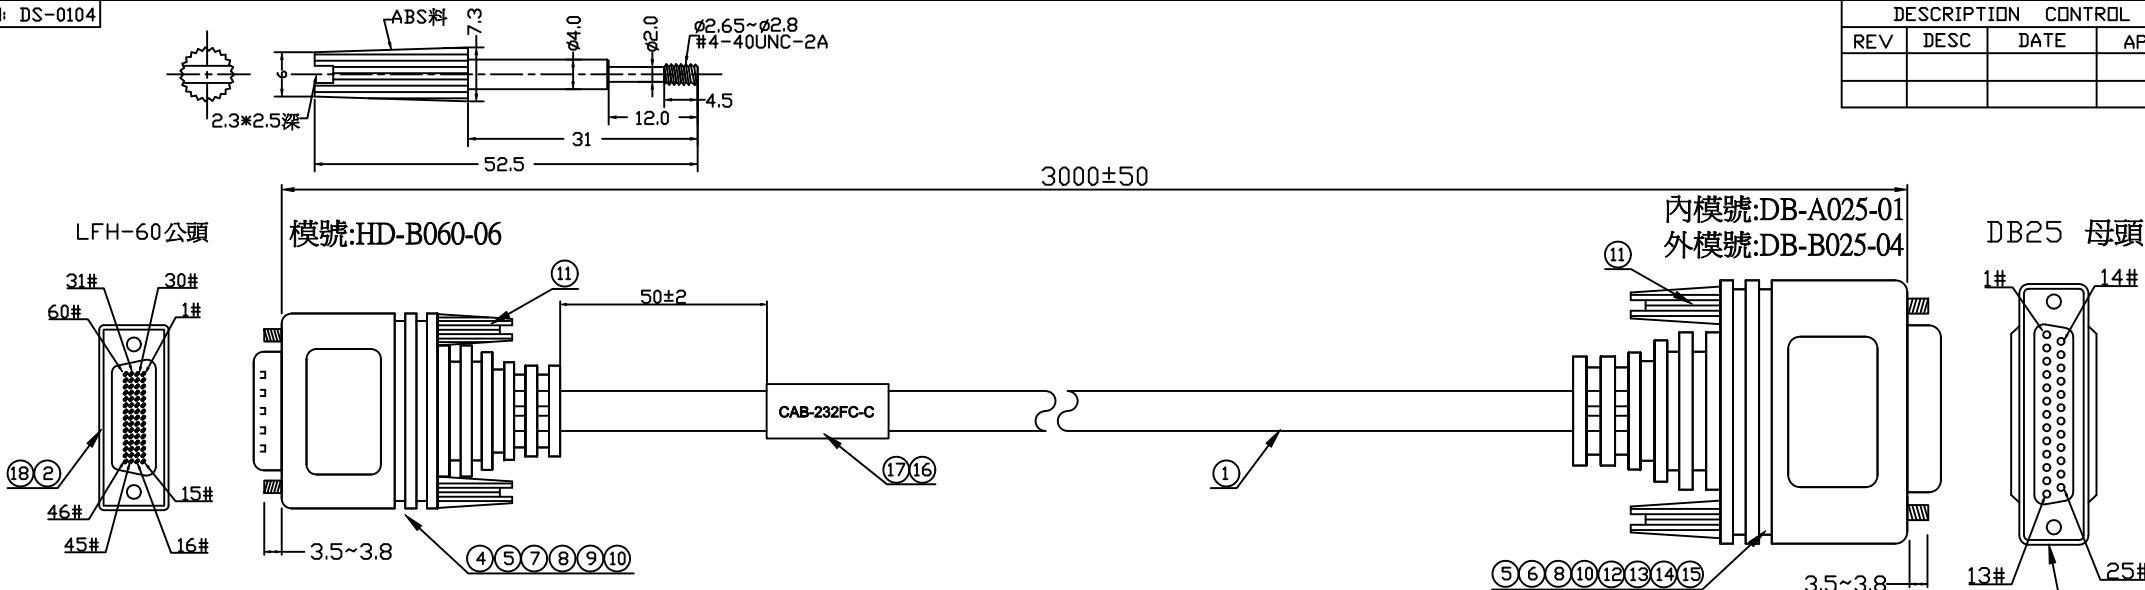

※	CARTON-40*36*30	1/40	PCS	H0003
※	16:15.5"30"0.1MM	1/40	PCS	H0002
※	PE-BAG-8"11"0.06MM	1	PCS	H0024
※	TIE-WHITE-120	1	PCS	F0003
※	LFH60PIN-CAP 綠色	1	PCS	H0014
※	CAP:DB25P-FEMALE 依綠色	1	PCS	H0044
18	LFH60PIN 公端 齊騰	4	PCS	B0101
17	HT-TUBE-ø9.0*30	1	PCS	T0026
16	線材貼紙	1	PCS	H0892
15	LPE	8.7	G	G0008
14	TAPE-30*100	1	PCS	M3000
13	FOL CU-30*100	1	PCS	F3000
12	TAPE-25*100	1	PCS	M2500
11	SRW-E31-GREEN-Ni-ABS	4	PCS	C0043
10	PVC-GREEN(U44L)-50	50.3	G	G0012
9	PVC TUBE-ø1.0*20	1	PCS	T4000
8	TAPE-6*50	2	PCS	M0600
7	PLATED-DB15-ø10.0 一體式	1	PCS	D0007-60
6	SOL WIRE-1.2	0.8	G	F0007
5	SOL WIRE-1.0	0.9	G	F0006
4	HT-TUBE-ø1.0*6	13	PCS	T1000
3	DB-25F-BK-SOLDER TYPE	1	PCS	A0014
2	LFH-60M-BLACK	1	PCS	A0378
1	28#12.5P-ADB-GREEN-3.0M- -ø8.5-CL2 CSA	1	PCS	E0099
NO	DESCRIPTION	QTY	UNIT	P/N

PIN ASSIGNMENT

LFH60 公 DB25 母

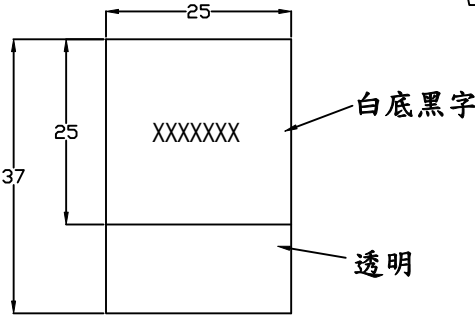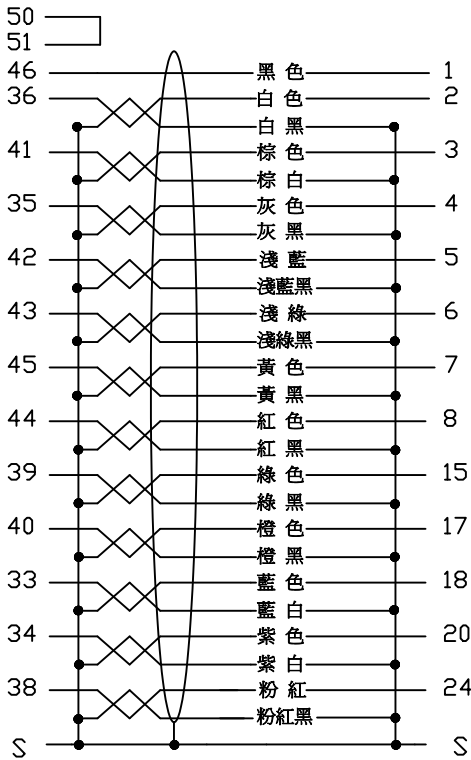

- NOTE:
- 1.測試條件:電壓300V,絕緣阻抗20MΩ,導通阻抗3Ω
高壓測試時間0.01S,搖擺測試時間為3S.
 - 2.注意外模兩邊皆無鑲LOGO.
 - 3.條碼編號以訂單為準,按條碼編號順序裝箱.
 - 4.兩端地線要直接接殼.

SECONN INTERNATIONAL ENTERPRISE CO., LTD.		
	REV	PART NO: SE-S-0104
	A	LFH 60 PIN MALE TO VGA 25 PIN FEMALE CABLE 3000MM LENGTH
DRAW,BY:		DATE: 2005/10/25
CHECK,BY:		CUSTOMER P/N:
APP,BY:		ALL DIMENSIONS IN mm